

## Direct current electronic drivers Alimentatori elettronici in corrente continua

Made in Italy

constant CURRENT constant VOLTAGE

IS 15885 (Part 2 / Sec 13)  
EAC S (7)  
R - 41049751

DAMP LOCATION

UL-CLASS2 (3)  
C RUL US  
CSA-LVLE

ENEC 05

KEMA KEUR

CCC

100

M M

SELV 60V

RIPPLE FREE



1.1

Single current drivers - Without PFC - Switchable  
Alimentatori corrente singola - Senza PFC - Non regolabili

1-2KV DIFF. 2KV COMM. SEC. SWITCH SAFETY PROTECTIONS

### Rated Voltage Tensione Nominale

100 V <sup>(2)(3)</sup>  
100 ÷ 120 V <sup>(3)</sup>  
110 ÷ 240 V <sup>(4)</sup>

### Frequency Frequenza

50-60 Hz

### AC Operation range Tensione di utilizzo AC

100 ÷ 264 V

### DC Operation range Tensione di utilizzo DC

(see page info15)  
176 ÷ 276 V

### Power - Potenza

0 ÷ 12 W

### iTHD

≥ 90% <sup>(1)</sup>

### Output current ripple

≤ 3% <sup>(1)</sup>

### Standards compliance

CSA C22.2 no. 223 <sup>(2)</sup>  
EN 50172 (VDE 0108)  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61347-1  
EN 61347-2-13  
EN 61547  
UL 1310 <sup>(2)</sup>  
UL 8750 <sup>(2)</sup>  
VDE 0710-T14

### Max. pcs for CB B16A

(see page info17)  
27 pcs

### In rush current

27A 250μsec

Article Articolo	Code Codice	P out W	V out DC <sup>(1)</sup>	I out DC	U out V	ta °C	tc °C	λ max. Power Factor	η max. Efficiency <sup>(1)</sup>
DC 6W 210mA BMU <sup>(5)(8)</sup>	122796	6,5 <sup>(2)(4)</sup>	3...33	210 mA cost.	36	-25...+60	80	0,54 (0,64 <sup>(2)</sup> ) C	> 75
DC 9W 280mA BMU <sup>(6)</sup>	122797	9 <sup>(2)(4)</sup>	3...33	280 mA cost.	36	-25...+55	80	0,54 (0,64 <sup>(2)</sup> ) C	> 75
DC 12W 350mA BMU <sup>(8)</sup>	122790	12 <sup>(4)(10<sup>(2)</sup>)</sup>	2...31	350 mA cost.	36	-25...+50	80	0,54 (0,64 <sup>(2)</sup> ) C	> 80
DC 12W 500mA BMU <sup>(8)</sup>	122794	12 <sup>(4)(10<sup>(2)</sup>)</sup>	2...24	500 mA cost.	25	-25...+50	80	0,54 (0,64 <sup>(2)</sup> ) C	> 81
DC 12W 700mA BMU <sup>(8)</sup>	122792	12 <sup>(4)(10<sup>(2)</sup>)</sup>	2...16	700 mA cost.	19	-25...+50	80	0,54 (0,64 <sup>(2)</sup> ) C	> 80

<sup>(1)</sup> Referred to  $V_{in} = 230$  V, 100% load - Riferito a  $V_{in} = 230$  V, carico 100%



<sup>(5)</sup> Pending UL

<sup>(6)</sup> Pending ENEC 05 - KEMA KEUR - UL - CCC

<sup>(7)</sup> 122796BIS - 122797BIS - 122790BIS - 122794BIS - 122792BIS:


order codes for BIS marked products - codici di ordine per i prodotti marchiati BIS

BUILT-IN SCREW FIXING Weight - Peso gr. 45 / 1,6 oz.  
Pcs - Pezzi 70



### Wiring diagram - Schema di collegamento

(Max. LED distance on page info8 - Massima distanza LED a pagina info8)

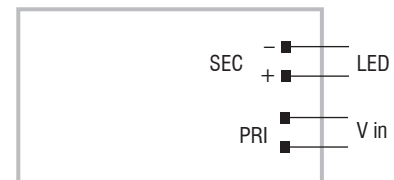

### Features

- Driver for built-in use.
- Input and output terminal blocks on the same side.
- It can be used for lighting equipment in protection class I and II.
- Single terminal block at the primary and secondary circuit (wire cross-section up to 1,5 mm<sup>2</sup> / AWG15).
- Driver can be secured with slot for screws.
- Ultra compact size.
- Protections:
  - against overheating and short circuits;
  - against mains voltage spikes;
  - against overloads.
- Current regulation -6 % +5 % including temperature variations.

### Caratteristiche

- Alimentatore da incorporare.
- Morsetti di entrata e uscita sullo stesso lato.
- Utilizzabile per apparecchi di illuminazione in classe di protezione I e II.
- Singolo morsetto su primario e secondario (sezione cavo fino a 1,5 mm<sup>2</sup> / AWG15).
- Fissaggio dell'alimentatore tramite asole per viti.
- Dimensioni molto ridotte e compatte.
- Protezioni:
  - termica e cortocircuito;
  - contro le extra-tensioni di rete;
  - contro i sovraccarichi.
- Corrente regolata -6 % +5 % incluse variazioni di temperatura.

7 YEARS WARRANTY 3% FAILURE RATE  
10 YEARS WARRANTY 5% FAILURE RATE

PRODUCER'S LIABILITY  
10 YEARS WARRANTY TO THE CONTRACTOR ACCORDING TO THE CONTRACTOR'S CONDITIONS