

# Constant Voltage LED Power Supply

SDN200-24/48VL6

SDN200-24VL8



Dimming & CCT



## Product description

SDN200 series is an indoor constant voltage LED DALI power supply with an input voltage range of 198-264Vac , efficiency is up to 94%,adopt fanless design, working in the temperature range of - 20 ° C to + 45° C under free air convection.It has a high power factor, ultra-low total harmonic distortion, low standby power consumption and other comprehensive protection functions, which not only greatly improve the reliability of the product, but also guarantee the product life cycle.This series of products is designed for LED lighting and is used in indoor lighting applications. They are suitable for a wide range of applications in almost any environment where LED luminaires can be installed.Comply with DALI2.0 standard (IEC 62386-101, 102, 207, 209), Innovative thermal management technology, intelligent protection of power supply life.

## Standards

EN61347-1  
EN61347-2-13  
EN61547  
EN55015  
EN61000-3-2  
EN61000-3-3  
EN62384  
EN62493  
IEC 62386-101, 102, 207

## Characteristics

- European AC input (220-240VAC)
- Built-in active PFC function
- IP20
- DALI-2.0 DT6/DT8 dimming LED Driver
- Built in press dimming function
- dimming range: 1-100%
- Suitable for dry indoor environment
- Protections: Short circuit / Over voltage / Over temperature
- Adopt plastic case and internal glue filling
- Compliance to worldwide safety regulations for lighting
- 5 years warranty


[www.snappy.cn](http://www.snappy.cn)

## Specifications

Model		SDN200-24VL6/8	SDN200-48VL6
Output	turn on time(S)	<0.5	
	output power(W)	200	
	output voltage(V)	24	48
	output voltage tolerance	$\leq \pm 5\%$	
	ripple voltage(mV)	240	480
	Line Regulation	1%	
	Load Regulation	3%	
	working current range(A)	0.833-8.33	0.416-4.16
	SVM	0.1	
	Pst	0.1	
	dimming type	YES	
	dimming range	1-100%	
Input	rated DC supply voltage(Vdc)	NA	
	rated supply voltage(Vac)	220-240	
	voltage range(Vac)	198-264	
	line frequency(Hz)	50/60	
	input current(A)	1.2	
	efficiency (TYPE)	93%@full load	94%@full load
	average efficiency(TYPE) 3	92%	93%
	no load power consumption(W)	$\leq 0.5W$	
	power factor	0.95@full load	
	Displacement factor	0.95	
	THD(typ.)	5%	
	inrush current(Ipk)	60A/440uS	
	Leakage current (mA)	0.7@240Vac 60Hz	
Protection	short circuit protection	hiccup mode, restart automatically after fault correction.	
	over load protection	exceed maximum rated load times 1.6	
	Over voltage protection	Latch off,power on again after fault correction	
	Over temperature protection	Latch off,power on again after fault correction	
	surge capacity	L-N: 1KV	
	Withstand voltage	Input-Output: 3000V/5mA/1min	
	Ta(C)	-20...45(refer to load derating curve)	


Ambient and Life	Tc max.(C)	max.90											
	Storage Temperature(C)	-30...80											
	ambient humidity range	5%...85%RH, Not condensing											
	nominal life-time(hrs)	50'000@Ta											
Other	dimensions (L×W×H)(mm)	334.8mm * 41.5mm * 27.5mm											
	weight(g)	400											
	casing material	Plastics											
	housing colour	White											
	type of protection	IP20											
	protection class	class II											
Note	certificate												
	1.Tolerance:includes set up tolerance, line regulation and load regulation.												
	2.Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs.												
	3.Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic average of these four values.												
	4.All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature.												
	5.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.												
	<table><tr><td>Function</td><td>Press time</td></tr><tr><td>Status no change</td><td>&lt;0.05 sec.</td></tr><tr><td>Push ON/OFF</td><td>0.1-1 sec.</td></tr><tr><td>Long press to dim down or up</td><td>1.5-10 sec.</td></tr><tr><td>Long press in the off state, dimming from the minimum value</td><td>&gt;1 sec.</td></tr></table>			Function	Press time	Status no change	<0.05 sec.	Push ON/OFF	0.1-1 sec.	Long press to dim down or up	1.5-10 sec.	Long press in the off state, dimming from the minimum value	>1 sec.
	Function	Press time											
	Status no change	<0.05 sec.											
	Push ON/OFF	0.1-1 sec.											
Long press to dim down or up	1.5-10 sec.												
Long press in the off state, dimming from the minimum value	>1 sec.												
PUSH push-button dimming/color temperature adjustment.													
Dimming: long press .													
Switch: short press.													
Dimming memory: When the light is turned off and turned on again, the light will return to the previously adjusted brightness level.													
Each long press will adjust the brightness in the opposite direction.													
Long press for more than 15S is a synchronization function, and all devices will be adjusted to 50%. Press and hold again to adjust the dimming brightness downward. (DT8 color temperature will be unified to 4500K, and long press again will adjust the color temperature downward.)													

## Dimensions(mm)

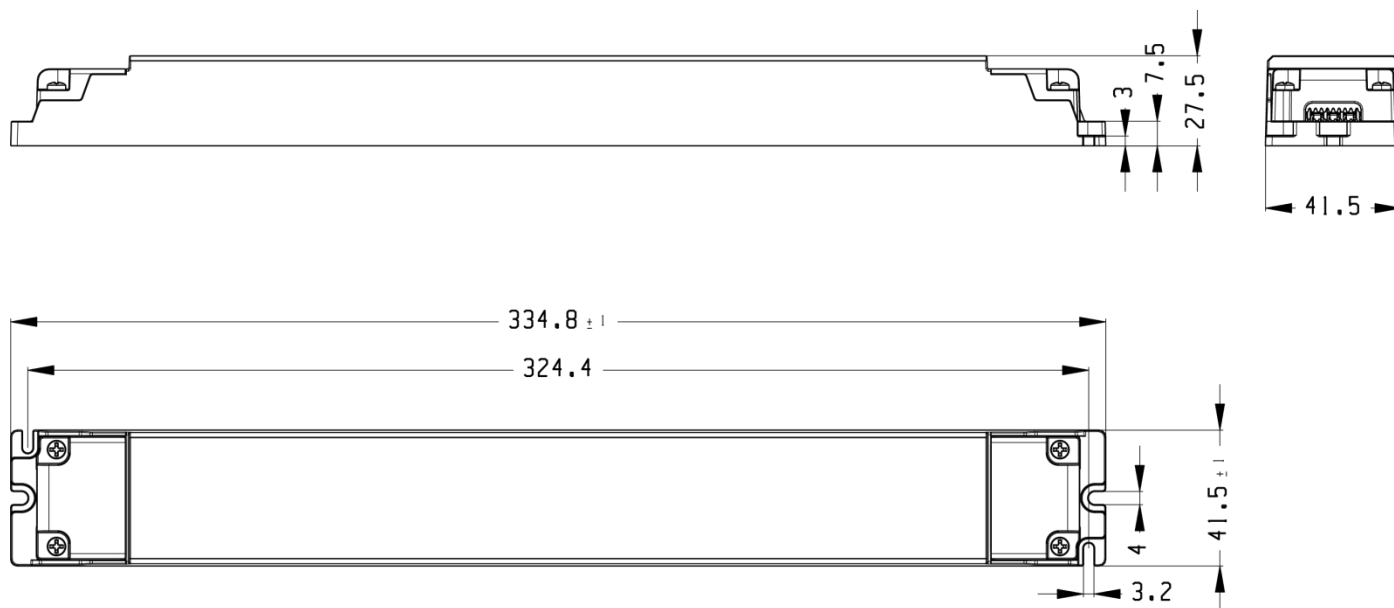


## Wiring Diagram

**DALI dimming scheme connection diagram (DT8) Note: LED-(C) is not connected when DT6 is connected**

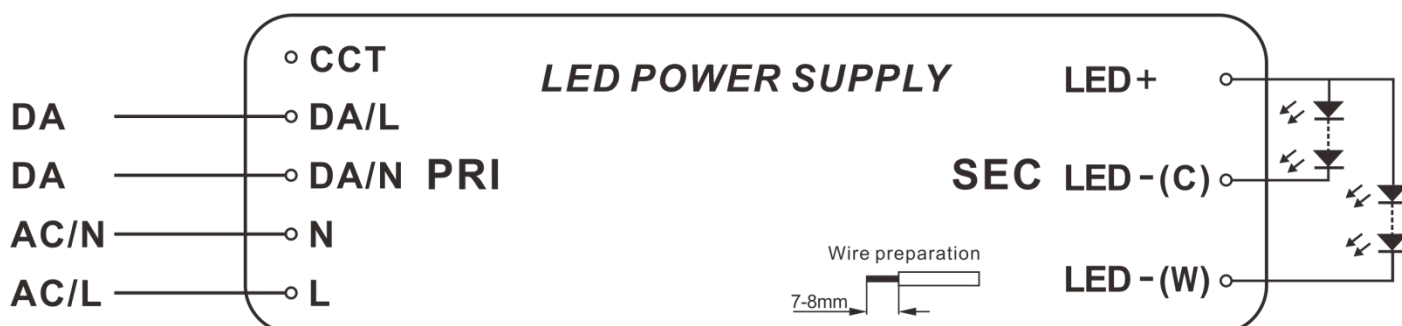


**PUSH dimming scheme connection diagram (DT8) Note: When DT6 is connected, LED-(C) is not connected and Push CCT is not connected.**

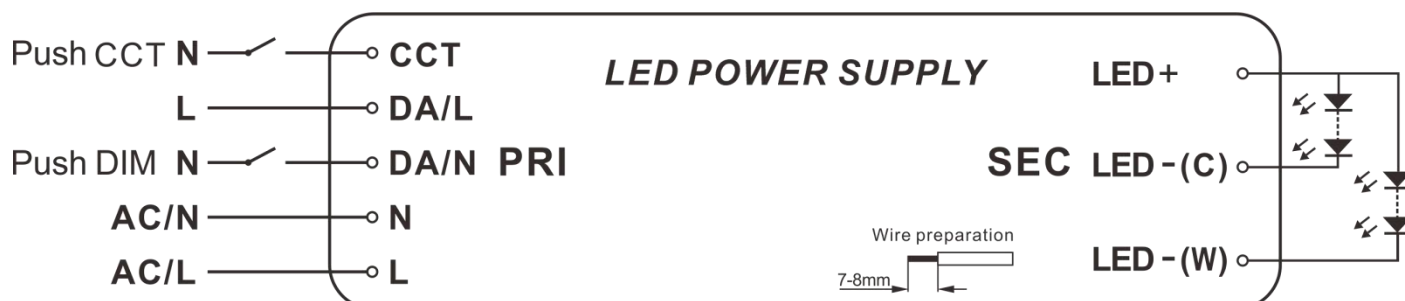

AC	H03VVH2-F 2*0.75mm <sup>2</sup>
dali	H03VVH2-F 2*0.75mm <sup>2</sup>
DC	H05VVH2-F 2*1.0mm <sup>2</sup>

## Electrical curves


**Fig. 1 Output load-Temperature curve**

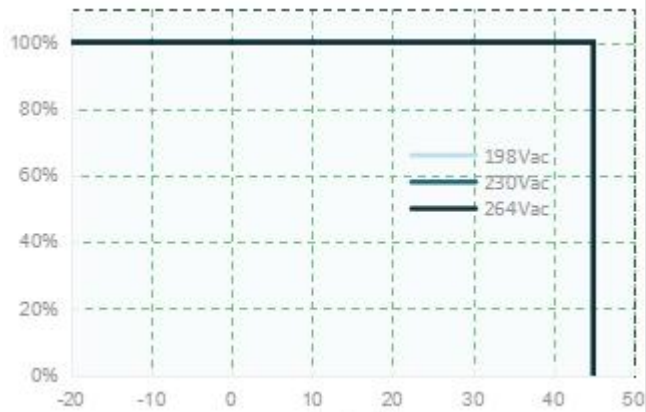


**Fig. 2 Static characteristic curve**



**Fig. 3 I-V curve**

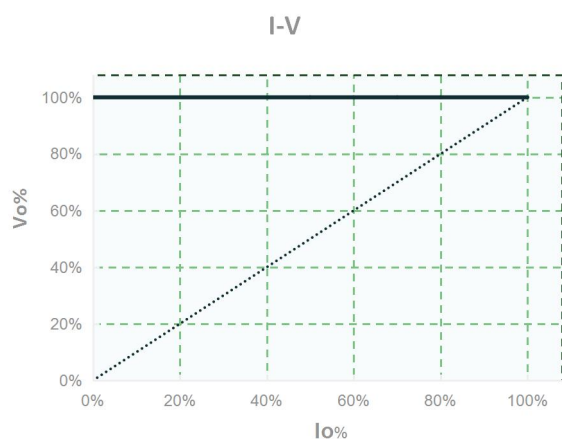


**Fig. 4 Power factor characteristic curve**

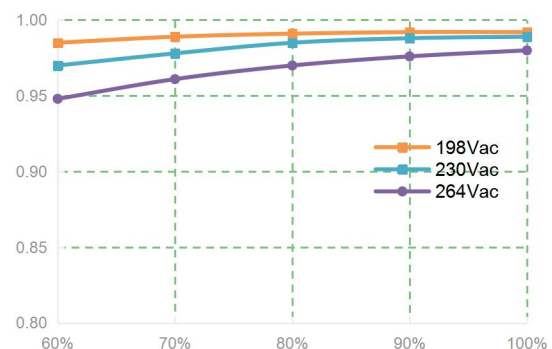

**Fig.5 Total harmonic distortion curve (THD)**



**Fig.6 Efficiency-Load curve**

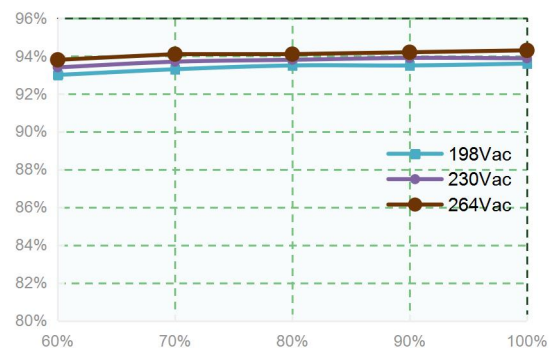

## MCBS

MCBS Model	B10	B13	B16	B20	C10	C13	C16	C20
SDN200-24VL6/8	4	4	5	6	4	5	6	8
SDN200-24VL6	4	4	5	6	4	5	6	8

## Package

Model	Carton quantity(pcs)	Carton dimension(mm)	G.W./CTN(kg)
SDN200-24VL6/8			
SDN200-24VL6			

## Revision history

Date	Rev.	Remark
2023.7.31	A3	Official release