




(XTR-240-xx)



(XTR-240-xxLA)



(XTR-240-xxPI)

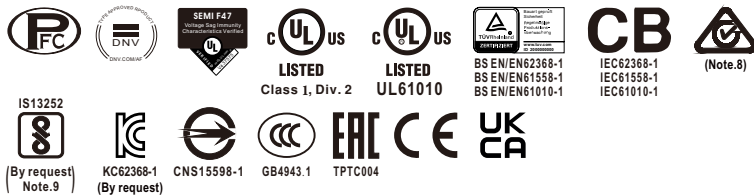


## Features

- Three-Phase 320 ~ 600Vac wide range input, 600 ~ 700Vac surge input for 1 sec. occasionally (Dual phase operation possible)
- Global certificates in multi-fields(ITE 62368-1, Industrial 61558-1/-2-16,61010) & Marine DNV, SEMI47, C1D2 HazLoc approved
- 48mm Ultra slim width
- High efficiency up to 93.5% and no load power dissipation <2.5W
- 150% Peak Power capability
- Built-in constant current limiting circuit
- Current sharing up to 960W(3+1) for parallel use (By request)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+85°C wide range operation temperature (>+60°C derating)
- Operating altitude up to 5000 meters
- Built-in DC OK relay contact
- Ultra low inrush current < 10A
- Built-in ORing FET (By request)
- Tool free terminal block (LA type)
- Conformal coating
- Can be installed on DIN Rail TS-35/7.5 or 15
- 5 years warranty

## Description

The XTR-240 series is a 240W AC/DC 3Ø 320~600Vac input ultra slim industrial high-reliability DIN rail power. Key features of this series include a narrow 48 mm casing, optimizing system installation space, it boasts a maximum efficiency of 93.5% and a low standby power consumption <2.5W for energy savings and carbon reduction. It provides constant current with up to 150% peak power; fanless design, ultra-wide operating temperature range of -40 to +85°C (up to +60°C at full load); OVCIII compliance; parallel function capability up to 960W(By request); ultra-low inrush current of <10A; built-in DC OK and ORing FET(optional); internal PCB coating offers basic moisture and dust protection, and it has multiple terminal blocks for selection. With comprehensive protection functions, complete safety certifications, and a 5-years warranty, the XTR-240 series is a compact, high-performance, and highly reliable DIN rail power supply.

## Model Encoding

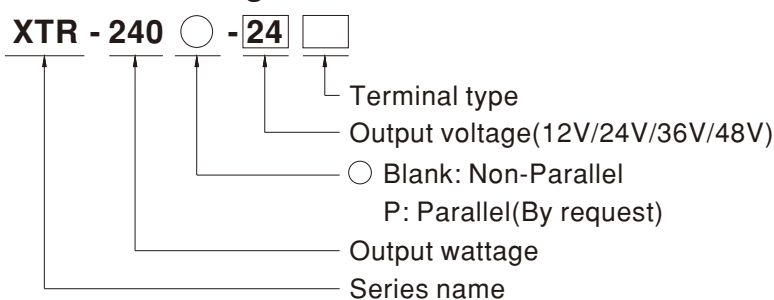




## Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

| Terminal Type Options |  | Note     |
|-----------------------|--|----------|
| Blank                 | Screw Terminal  | In stock |
| LA                    | Lever-Actuated  | In stock |
| PI                    | Push In         | In stock |



# 240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series


| SPECIFICATION                    | XTR-240○-12□  | XTR-240○-24□   | XTR-240○-36□ | XTR-240○-48□ |      |
|----------------------------------|---|--|--------------|--------------|------|
|                                  | ○ =Blank, P      □=Blank, LA, PI  |  |              |              |      |
| <b>OUTPUT</b>                    |   |  |              |              |      |
| DC VOLTAGE                       | 12V   | 24V  | 36V          | 48V          |      |
| RATED CURRENT                    | 15A   | 10A  | 6.66A        | 5A           |      |
| CURRENT RANGE                    | 0 ~ 15A   | 0 ~ 10A  | 0 ~ 6.66A    | 0 ~ 5A       |      |
| RATED POWER                      | 180W  | 240W   | 239.8W       | 240W         |      |
| PEAK                             | CURRENT(5 sec.)   | 22.5A  | 15A          | 10A          | 7.5A |
|                                  | POWER(5 sec.)   | 270W   | 360W         | 360W         | 360W |
| RIPPLE & NOISE (max.)            | Note.2 100mVp-p   | 100mVp-p   | 120mVp-p     | 120mVp-p     |      |
| VOLTAGE ADJ. RANGE               | 12 ~ 15V  | 24 ~ 29V   | 36 ~ 42V     | 48 ~ 55V     |      |
| VOLTAGE TOLERANCE                | Note.3 ±1.0%  | ±1.0%  | ±1.0%        | ±1.0%        |      |
| LINE REGULATION                  | ±0.5%   | ±0.5%  | ±0.5%        | ±0.5%        |      |
| LOAD REGULATION                  | ±1.0%   | ±1.0%  | ±1.0%        | ±1.0%        |      |
| SETUP, RISE TIME                 | 2000ms, 60ms/400Vac    1500ms, 60ms/500Vac at full load   |  |              |              |      |
| HOLD UP TIME (Typ.)              | 20ms / 400Vac    40ms / 500Vac at full load   |  |              |              |      |
| <b>INPUT</b>                     |   |  |              |              |      |
| VOLTAGE RANGE                    | Note.4 Three-Phase 320 ~ 600Vac   | 450 ~ 800Vdc (Dual phase operation possible in connecting L1,L3,FG or L2,L3,FG,L3 is DC+ ) |              |              |      |
| NO LOAD POWER CONSUMPTION (Typ.) | 2.5W/400Vac   | 2.5W/400Vac  | 2.5W/400Vac  | 2.5W/400Vac  |      |
| FREQUENCY RANGE                  | 47 ~ 63Hz   |  |              |              |      |
| POWER FACTOR (Typ.)              | PF ≥0.53/400Vac    PF ≥0.52/500Vac at full load   |  |              |              |      |
| EFFICIENCY (Typ.)                | 88.7%   | 92.5%  | 92.5%        | 93.5%        |      |
| AC CURRENT (Typ.)                | 0.69A/400Vac    0.6A/500Vac   |  |              |              |      |
| INRUSH CURRENT (Typ.)            | COLD START 10A/400Vac   |  |              |              |      |
| LEAKAGE CURRENT                  | <2mA / 530Vac   |  |              |              |      |
| <b>PROTECTION</b>                |   |  |              |              |      |
| OVERLOAD                         | 105%~150% rated output power for more than 5 sec then constant current limiting without shutdown at rate current when Vo=30%~100% |  |              |              |      |
| OVER VOLTAGE                     | 15 ~ 18V  | 30 ~ 36V   | 45 ~ 54V     | 56 ~ 65V     |      |
|                                  | Hiccup mode , recovers automatically after fault condition is removed   |  |              |              |      |
| OVER TEMPERATURE                 | Shut down o/p voltage or hiccup mode, recovers automatically after temperature goes down  |  |              |              |      |
| <b>FUNCTION</b>                  |   |  |              |              |      |
| PARALLEL(Optional)               | Up to 960W (3+1), please refer to Function Manual for more details  |  |              |              |      |
| DC OK RELAY CONTACT              | Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load  |  |              |              |      |
| <b>ENVIRONMENT</b>               |   |  |              |              |      |
| WORKING TEMP.                    | Note.5 -40 ~ +85°C (Refer to "Derating Curve")  |  |              |              |      |
| WORKING HUMIDITY                 | 20 ~ 95% RH non-condensing  |  |              |              |      |
| STORAGE TEMP., HUMIDITY          | -40 ~ +85°C, 10 ~ 95% RH non-condensing   |  |              |              |      |
| TEMP. COEFFICIENT                | ±0.03%/°C (0 ~ 60°C )   |  |              |              |      |
| VIBRATION                        | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6                      |  |              |              |      |





# 240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series

| SPECIFICATION  | XTR-240○-12□   | XTR-240○-24□  | XTR-240○-36□   | XTR-240○-48□ |
|--|--|---|--|--------------|
|  | ○=Blank, P      □=Blank, LA, PI  |   |  |              |
| <b>SAFETY &amp; EMC</b> <span style="float:right">Note.7&amp;8&amp;9</span>  |  |   |  |              |
| <b>SAFETY STANDARDS</b>  | CB IEC 62368-1, IEC 61558-1/2-16, IEC 61010-1/-2-201<br>TUV BS EN/EN 62368-1, BS EN /EN 61558-1/-2-16, BS EN/EN 61010-1/-2-201<br>UL <a href="#">UL121201/CSA C22.2 NO.213.17 Class I, Div. 2 Group A, B, C, D Hazardous Locations T4</a> ; UL/CUL 61010-1/-2-201<br>CCC GB4943.1<br>BSMI CNS15598-1<br>EAC TPTC004<br>Marine DNV SEMI F47 approved<br>KC/BIS <b>KC 62368-1 and BIS IS 13252 (Part 1) certified, No stock,contact sales by request</b> |   |  |              |
| <b>OVER VOLTAGE CATEGORY</b> <span style="float:right">Note.6</span>   | IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m )<br>IEC/EN/UL 61010-1/-2-201 (OVC II, altitude up to 5000m )<br>IEC/EN 62368-1 (OVC II, altitude up to 5000m )  |   |  |              |
| <b>SAFETY EXTRA-LOW VOLTAGE(SELV)</b>  | IEC/EN 61558-2-16 (SELV)<br>IEC/EN 62368-1 (SELV/ ES1 12V/24V/36V )  |   |  |              |
| <b>WITHSTAND VOLTAGE</b>   | I/P-O/P:4.87KVac I/P-FG:2.5KVac O/P-FG:0.5KVac O/P-DC OK:0.5KVac   |   |  |              |
| <b>ISOLATION RESISTANCE</b>  | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C / 70% RH  |   |  |              |
| <b>EMC EMISSION</b>  | <b>Parameter</b>   | <b>Standard</b>   | <b>Test Level / Note</b>   |              |
|  | Conducted  | BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832 | Class B  |              |
|  | Radiated   | BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832 | Class B  |              |
|  | Harmonic Current   | BS EN/EN61000-3-2   | Class A  |              |
|  | Voltage Flicker  | BS EN/EN61000-3-3   | -----  |              |
| <b>EMC IMMUNITY</b>  | BS EN/EN55035 , BS EN/EN61204-3 , BS EN/EN61000-6-2:2005 , BS EN/EN IEC61000-6-2:2019, KS C 9835,SEMI F47 tested at 200Vac   |   |  |              |
|  | <b>Parameter</b>   | <b>Standard</b>   | <b>Test Level / Note</b>   |              |
|  | ESD  | BS EN/EN61000-4-2   | Level 4, 15KV air ; Level 4, 8KV contact                                 |              |
|  | Radiated Field   | BS EN/EN61000-4-3   | Level 3, 10V/m ; criteria A  |              |
|  | EFT / Burst  | BS EN/EN61000-4-4   | Level 4, 4KV ; criteria A  |              |
|  | Surge  | BS EN/EN61000-4-5   | Level 4, 2KV / Line-Line, Level 4, 4KV/ Line-Earth                       |              |
|  | Conducted  | BS EN/EN61000-4-6   | Level 3, 10V/m ; criteria A  |              |
|  | Magnetic Field   | BS EN/EN61000-4-8   | Level 4, 30A/m ; criteria A  |              |
|  | Voltage Dips and Interruptions   | BS EN/EN61000-4-11  | >95% dip 0.5 periods, 30% dip 25 periods > 95% interruptions 250 periods |              |
| <b>OTHERS</b>  |  |   |  |              |
| <b>MTBF</b>  | 1432.3K hrs min. Telcordia SR-332(Bellcore) ; 191.5K hrs min. MIL-HDBK-217F (25°C)   |   |  |              |
| <b>DIMENSION</b>   | 48*125.2*125mm (W*H*D)   |   |  |              |
| <b>PACKING</b>   | 990g ; 12pcs/12.9Kg/1.16CUFT   |   |  |              |
| <b>NOTE</b>  |  |   |  |              |
| 1. All parameters NOT specially mentioned are measured at 400Vac input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. Dual phase operation is allowed under certain derating to output load. Please refer to derating curves for details.<br>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power.<br>In case the adjacent device is a heat source, 15mm clearance is recommended.<br>6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).<br>7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."<br>(as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> )<br>8. The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable.<br>The use of the RCM mark complies with AS/NZS 4417.1.<br>9. Some factory or model may not have the BIS logo, please contact your MEAN WELL sales for more information.<br>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a> |  |   |  |              |

## Block Diagram

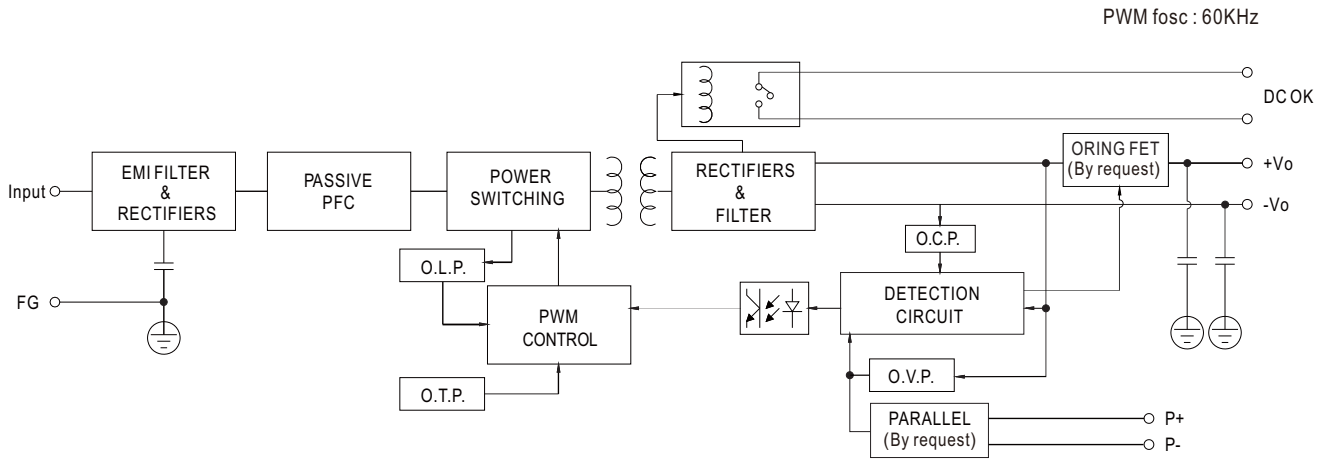


## Derating Curve

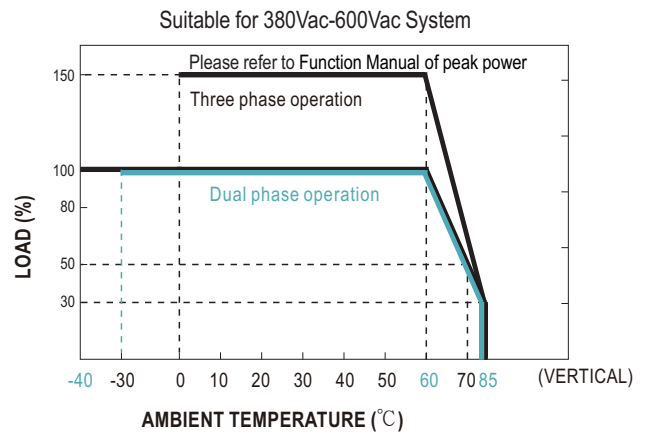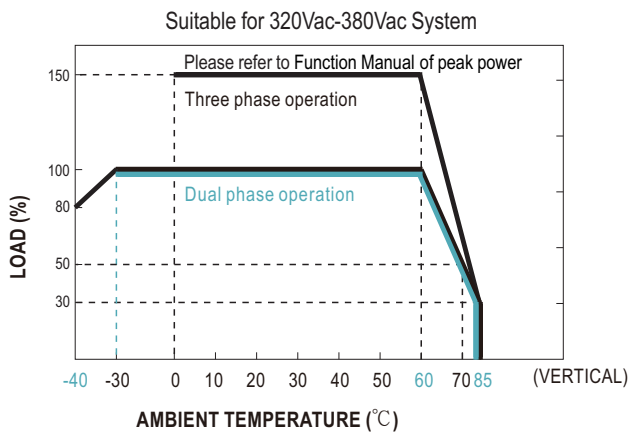

Note : Dual phase operating temperature is between -30°C~+85°C.

## Output derating VS input voltage

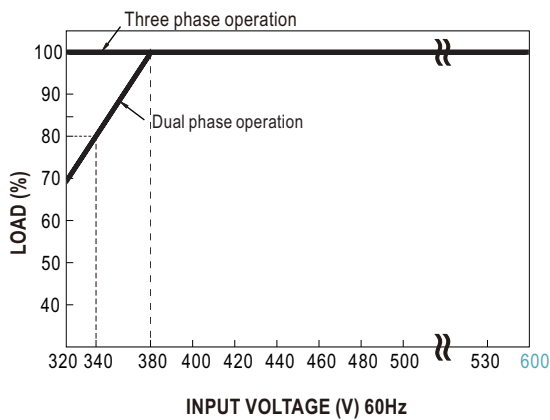

Note : When ambient temperature is between -30°C~-10°C and unit is operated in dual-phase input mode :  
 - At dual-phase input 320~380Vac, power supply can be loaded but might experience hiccup at cold start for 5~10 seconds.

■ Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$Duty = \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

$P_{av}$  : Average output power (W)


$P_{pk}$  : Peak output power (W)

$P_{npk}$  : Non-peak output power (W)


$P_{rated}$  : Rated output power (W)

$t$  : Peak power width (sec)

$T$  : Period (sec)

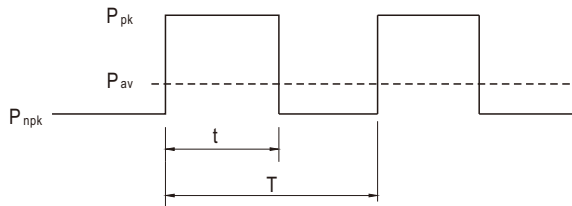

— 3Ø 320 ~ 600Vac

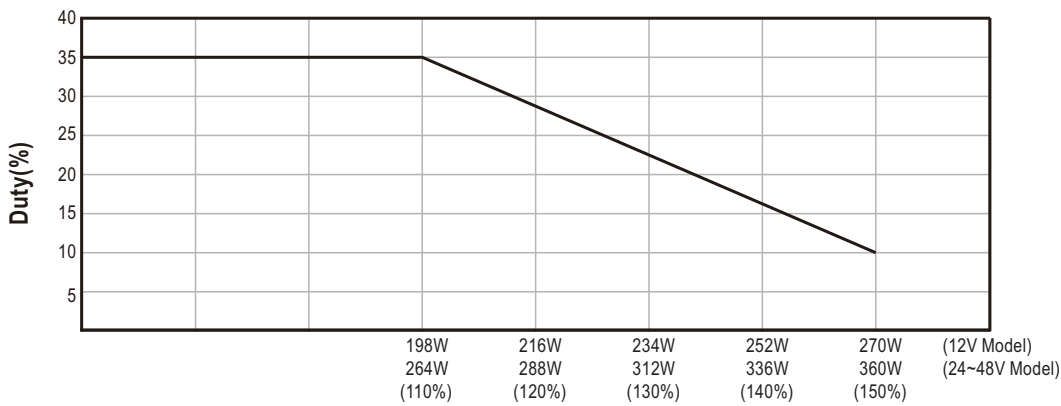

Peak output power (W)

**For example (24V model) :**

$V_{in} = 400V$      $Duty_{max} = 10\%$

$P_{av} = P_{rated} = 240W$

$P_{pk} = 360W$

$t \leq 5 \text{ sec}$



$$T \geq \frac{5 \text{ sec}}{10\%} \geq 50 \text{ sec}$$

$$P_{npk} \leq \frac{T P_{av} - t P_{pk}}{T-t}$$

$P_{npk} \leq 226W$

■ Function Manual


| Pin No. | Function        | Description  |
|---------|-----------------|--|
| 1,2     | DC OK           | Contact close : PSU turns ON/DC_OK ;<br>Contact open : PSU turns OFF/DC_fail;<br>Contact ratings (max.): 30Vdc/1A ,30Vac/0.5A resistive load.  |
| 3       | P+ (By request) | Current sharing signal. When units are connected in parallel, the P+ pins of the units should be connected mutually to allow current balance between units.  |
| 4       | P- (By request) | Current sharing signal. When units are connected in parallel, the P- pins of the units should be connected mutually to allow current balance between units.<br>P- Signal is internally connected to -Vo. |

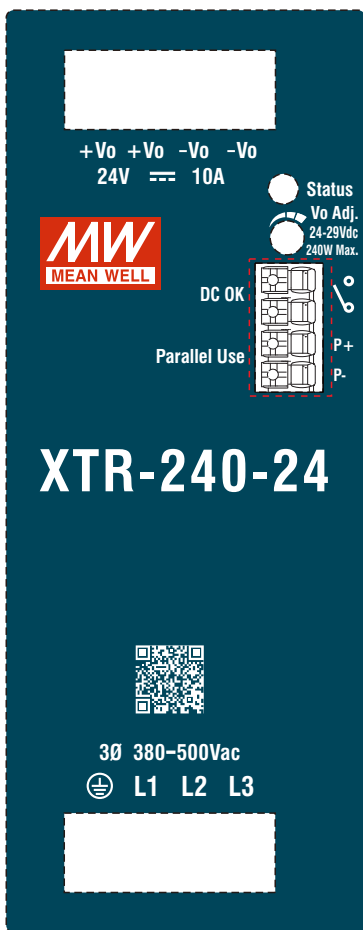

## 1.Parallel Use (By request)

XTR-240 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :



- (1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel).
- (2) Difference of output voltages among parallel units should be less than 0.2V.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (6) When in parallel operation, the minimum output load should be greater than 5% of total output load. (Min. load >5% rated current per unit x number of unit)
- (7) P+ and P- lines should be twisted in pairs

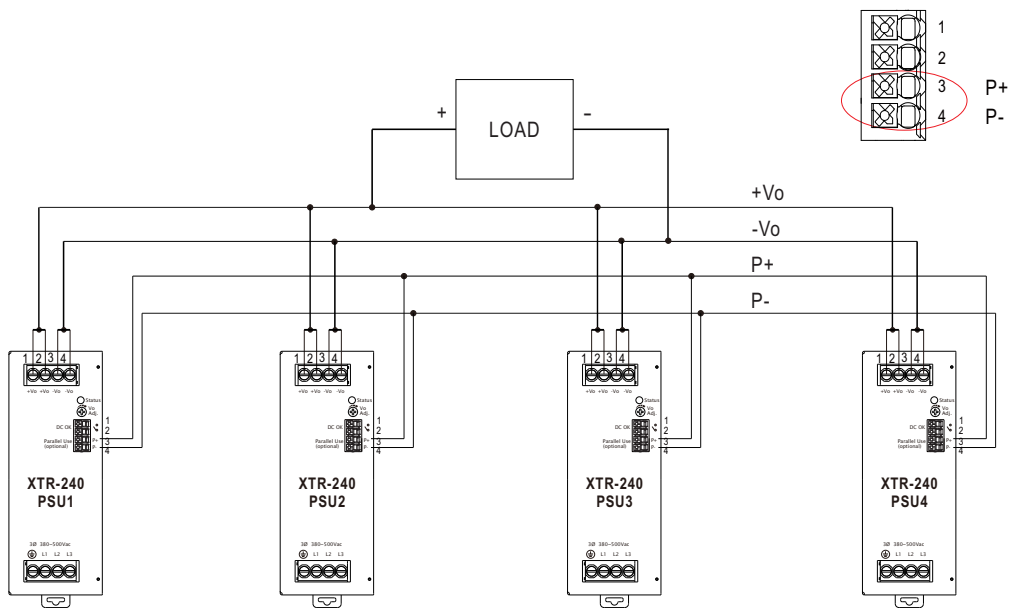

※ Please contact MEAN WELL for more details.

## 2.DC OK Relay Contact


|                        |                                      |
|------------------------|--------------------------------------|
| Contact Close          | PSU turns ON / DC OK.                |
| Contact Open           | PSU turns OFF / DC Fail.             |
| Contact ratings (max.) | 30Vdc/1A ,30Vac/0.5A resistive load. |

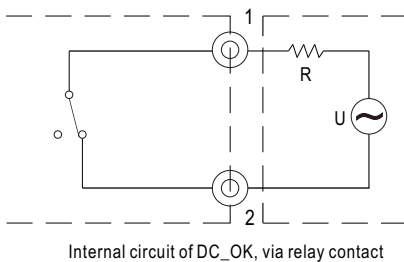

External voltage source (U) and resistor (R)  
(The max. Sink is 30Vdc/1A,30Vac/0.5A)

### 3. Protection Against Inverse Reverse From The Load (By request)

Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load.

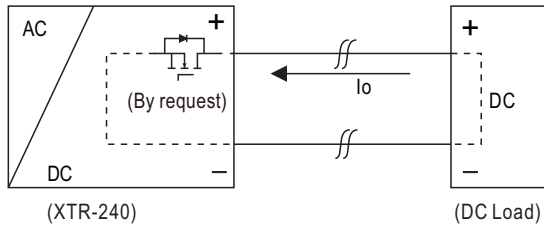


| PSU'S ORing FET turn OFF voltage |                                |
|----------------------------------|--------------------------------|
| MODEL                            | Max. allowable reverse voltage |
| XTR-240-12                       | <16V                           |
| XTR-240-24                       | <35V                           |
| XTR-240-36                       | <50V                           |
| XTR-240-48                       | <63V                           |

## ■ Mechanical Specification

(Unit:mm , Tolerance ±1mm)

Case No. 303

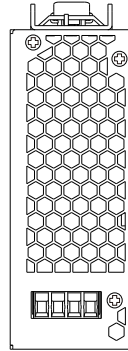


Ⓐ : Terminal Pin No. Assignment

| Pin No. | Assignment    |
|---------|---------------|
| 1,2     | DC Output +Vo |
| 3,4     | DC Output -Vo |

Ⓑ : Control Pin No. Assignment

| Pin No. | Assignment                     |
|---------|--------------------------------|
| 1,2     | DC OK Relay Contact            |
| 3       | P+(Current sharing,By request) |
| 4       | P-(Current sharing,By request) |

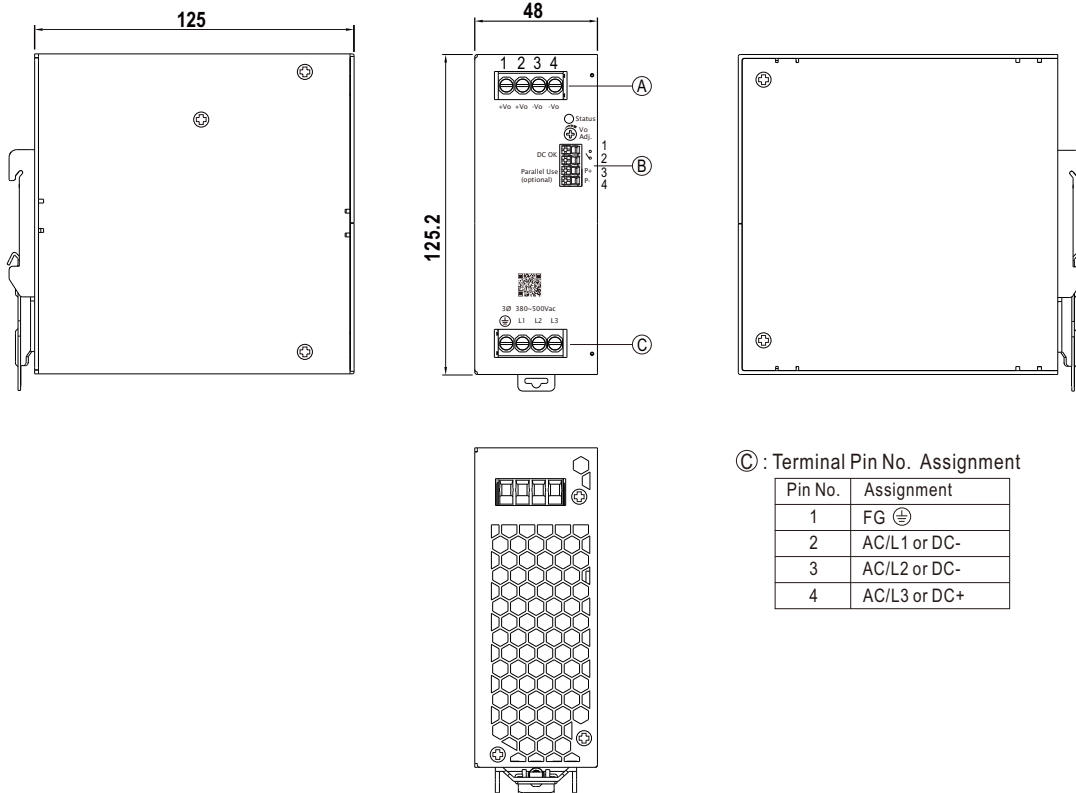

Ⓒ : Terminal Pin No. Assignment

| Pin No. | Assignment   |
|---------|--------------|
| 1       | FG Ⓧ         |
| 2       | AC/L1 or DC- |
| 3       | AC/L2 or DC- |
| 4       | AC/L3 or DC+ |

## ■ Recommend Wiring


※ Screw Terminal Torque

|                       |                  | AC Input T.B          | DC Output T.B         | Signal connector        |
|-----------------------|------------------|-----------------------|-----------------------|-------------------------|
| Solid Wire            |                  | 6mm <sup>2</sup> max. | 6mm <sup>2</sup> max. | 1.5mm <sup>2</sup> max. |
| A.W.G                 | XTR-240-12       | 18~10 AWG             | 12~10 AWG             | 24~16 AWG               |
|                       | XTR-240-24/36/48 |                       | 16~10 AWG             |                         |
| Wire Stripping Length |                  | 10~11mm               | 10~11mm               | 8~9mm                   |
| Screw Terminal Torque |                  | 5 Lb-In               | 5 Lb-In               | /                       |

※ Lever-Actuated and Push In

|                       |                  | AC Input T.B          | DC Output T.B         | Signal connector        |
|-----------------------|------------------|-----------------------|-----------------------|-------------------------|
| Solid Wire            |                  | 6mm <sup>2</sup> max. | 6mm <sup>2</sup> max. | 1.5mm <sup>2</sup> max. |
| A.W.G                 | XTR-240-12       | 18~10 AWG             | 12~10 AWG             | 24~16 AWG               |
|                       | XTR-240-24/36/48 |                       | 16~10 AWG             |                         |
| Wire Stripping Length |                  | 10~11mm               | 10~11mm               | 8~9mm                   |
| Screw Terminal Torque |                  | Not applicable        |                       |                         |

### ■ Installation Instruction

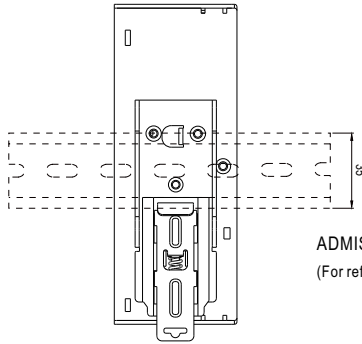

This series fits DIN rail TS35/7.5 or TS35/15.  
For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>