


Linetype LED Power Supply

SNP30-VF-1/SNP30-IF-1/SNP30-VF-2

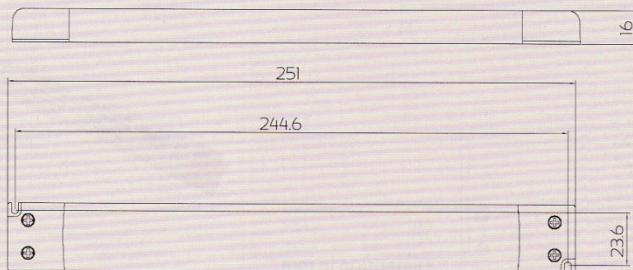

Dimension in mm

CV/CC Version



Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
SNP30-12VF-1	12V	0-30W	2.5A	≥ 0.9	50℃	80℃	251X30X16
SNP30-24VF-1	24V	0-30W	1.25A	≥ 0.9	50℃	80℃	251X30X16
SNP30-12VF-2	12V	0-30W	4.2A	≥ 0.9	45℃	80℃	251X30X16
SNP30-24VF-2	24V	0-30W	2.08A	≥ 0.9	45℃	80℃	251X30X16

Model No.	Constant output current	Load	Range output voltage	PF	Ta	Tc	L×W×H
SNP30-350IF-1	350mA	15-30W	43-86VDC	≥ 0.9	50℃	80℃	251X30X16
SNP30-500IF-1	500mA	15-30W	30-60VDC	≥ 0.9	50℃	80℃	251X30X16
SNP30-700IF-1	700mA	15-30W	21-43VDC	≥ 0.9	50℃	80℃	251X30X16
SNP30-1050IF-1	1050mA	15-30W	14-29VDC	≥ 0.9	50℃	80℃	251X30X16
SNP30-1400IF-1	1400mA	15-30W	11-22VDC	≥ 0.9	50℃	80℃	251X30X16

Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50Hz
- Output Power:30W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection
- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to
- EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012

M M F 110 SELV

