







Country of Origin : China  
 Operating Temperature : 0~40 [°C]  
 Dimension : 86.8 x 47.3 x 32.3 [mm]  
 Suitable AC cable: IEC320-C13  
 Efficiency level (ErP) :   
 Approvals / Marks :     



Certified also for: A. V. application

**Features:**

Wide range Input (90 ~ 264)VAC / (47 ~ 63) Hz.	For I.T.E. use only + RoHS conform.
Over load, over voltage & short protection.	Designed and certified also for cable IEC320-C7 & inlet C8 (T2).
Output connector: standard: 2.1 x 5.5 x 11mm or customer requirement.	


**Specification:**

	Model	Voltage DC [V]	Loading [A]	Tol. [%]	OCP [A]	OVP Max [V]	Efficiency [%]	Max. Power [W]	Ripple & Noise [mV]p-p	Connector UL approved [mm]
ErP V.	SYS1319-3012-T3	12	0~2.50	±5	3.0~8.0	16	>83.5	30	120	2.1x5.5x11
	SYS1319-3015-T3	15	0~2.00	±5	2.5~6.5	25	>80.6	30	150	2.1x5.5x11
	SYS1319-3018-T3	18	0~1.66	±5	2.0~5.5	25	>87.0	30	180	2.1x5.5x11
	SYS1319-3024-T3	24	0~1.25	±5	1.5~5.5	25	>84.0	30	240	2.1x5.5x11
OEM Production	This model is certified for Uout=(5,6,9,12,15,16,18,19,20,24)V and Pout=(5~30)W is rising in steps of 1W									
INPUT	Voltage	(90 ~ 264) VAC								
	Frequency	(47 ~ 63) Hz								
	Current	1A rms@ AC low line input and DC output full load								
	Surge Current max.	40/60Amax. @ power supply cold start, ambient temperature 25°C @115Vac/230Vac nominal AC input.								
	Leakage current	3.5mA Max.								
PROTECTION	Over load	OCP	> 120% Fold back							
	Over Voltage	OVP	> 105% Voltage limiting							
	Short Circuit	Yes, Output to Ground, Auto recovery when fault has been removed. Short Current & Over Current can not exceed 8A max. after 1minute at nominal line input.								
	Protection class	I.								
	No Load Operation	Yes, to protect the power supply and system from damage								
OTHERS	Dielectric Strength	I/P-O/P (FG): 3KVAC / 10mA / 1 min								
	Power ON Led	Yes								
	Turn on delay	3000 ms max. @ AC low line input @ output full load								
	Hold-up Time	10ms @ AC nominal Input and Output full load								
	MTBF Qualification	500,000 Calculated Hours at 25°C, by Telcordia SR-332								
	DC cable & connector	Standard length of the cable 1,8m & It depends on customer requirements and upon specifications								
	Efficiency (typical)	>83.5% @ 240VAC input & Full load								
	Power Consumption	Max. 0.3Wrms @ AC nominal Input and Output min. load   some models have achieved efficiency level IV.								
ENVIRONMENT	Input Fuse	250VAC / 1.6A protected against power line surges and any abnormal conditions								
	Temperature	Operating: (0 ~ 40)°C / Storage: (-20 ~ 85)°C								
	Humidity	Operating: (8 ~ 90)% RH / Storage: (5 ~ 95)% RH non condensing								

**SAFETY** CE | TUV/GS | CB | cULus | C-TICK |SAA | PSE | BSMI | KC |IT-License | CCC

CE	EMC	2014/30/EU
	LVD	2014/35/EU EN 60950-1:2006+A11+A1+A12+A2
WEIGHT	1pc	N.W.: 200g / pc 0.48 x 0.26 x 0.44 [m]
PACKING	Box	60 pcs / 1box
		G.W.: 15kg / box

**Mechanical case specification:**

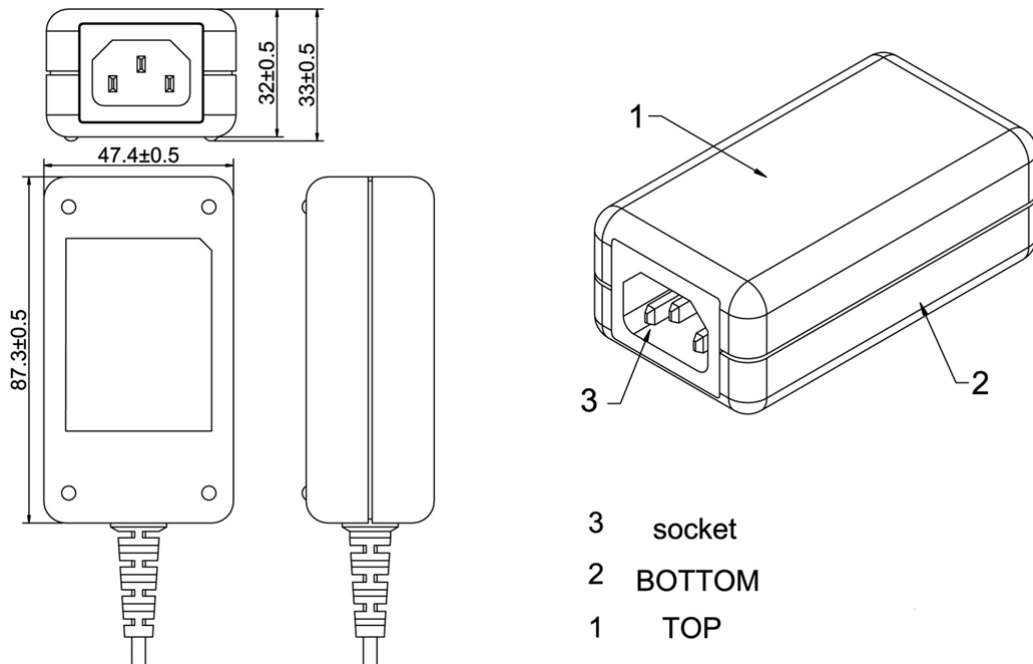

**Cable specification:**

1185#18\*1C + shield / 6FT (1830mm)

