



Your Reliable Power Partner



Building Automation Solutions

Product Range Overview



Company Profile

Established in 1982, MEAN WELL is a leading standard switching power supply manufacturers in the world. MEAN WELL currently operates under five companies in Taiwan, China, USA and Europe and three factories in Taiwan, GuangZhou and SuZhou. The product lines include AC/DC switching power supplies, DC/DC converters, waterproof LED drivers, adaptors, DC/AC inverters and battery chargers. We have over 10,000 standard models widely used in medical, automation, communication, LED lighting, moving sign, and office automation applications.

With more than 30 years of experience in R&D and production of standard power supplies, MEAN WELL has ten product categories covering 10,000 models, to provide "One Stop Shopping" power solutions. Every product in MEAN WELL is the result of rigid procedures governing design, design verification test (DVT), design quality test (DQT), component selection, pilot-run production, and mass production.

With more than 200 distributors globally, the MEAN WELL products are distributed to over 80 countries worldwide. The small size orders can expect delivery within 24 hours without MOQ requirement. If you are looking for switching power supply with high reliability, good quality, reasonable price and full series products, MEAN WELL, a total solution provider which can satisfy your various demands, is definitely your first choice!




MEAN WELL USA



MEAN WELL EUROPE



MEAN WELL TAIWAN

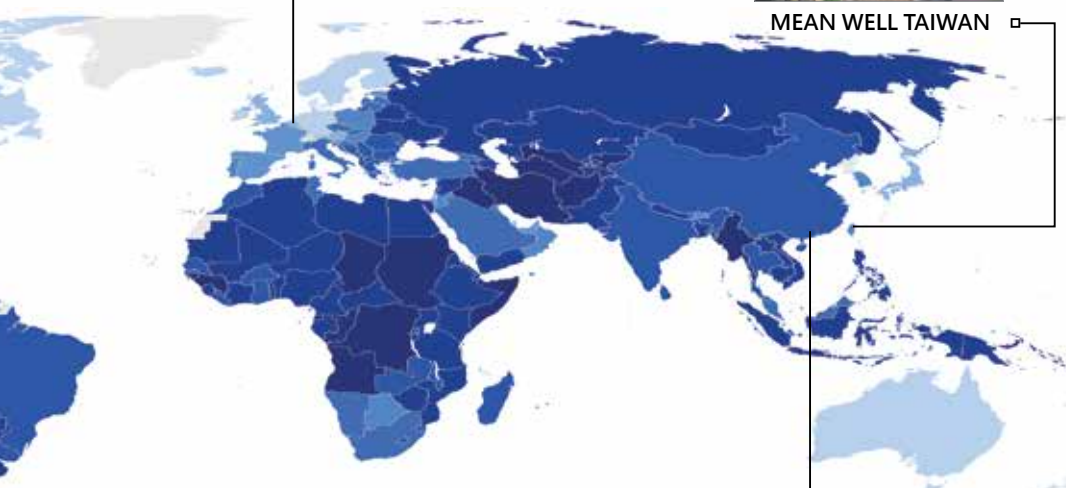

MEAN WELL SUZHOU



MEAN WELL GUANGZHOU
TIANHE R&D CENTER



MEAN WELL GUANGZHOU
HUADU FACTORY



KNX Introduction

What is KNX?

KNX is the only home and building control standard running global certification schemes.




The idea behind KNX is as simple as it is ingenious. KNX combines all main building functions like lighting, shutter control to heating, ventilation, security, energy management and more into one intelligent system. In this system, all devices communicate with one another via a single bus cable which is installed alongside the normal power lines. This means that all electrical functions are connected with one another via the bus system, which helps to lower operational costs resulting in considerable energy savings, to save installation time as well as to increase flexibility and adaptability to future developments.


Source: www.knx.org

Benefits

The MEAN WELL KNX system product is an intelligent solution for networking and controlling building technology. Since the targeted connections of devices and functions comply with the KNX standard, both living and working are not only become more convenient and secure, but also more energy-efficient and economical.

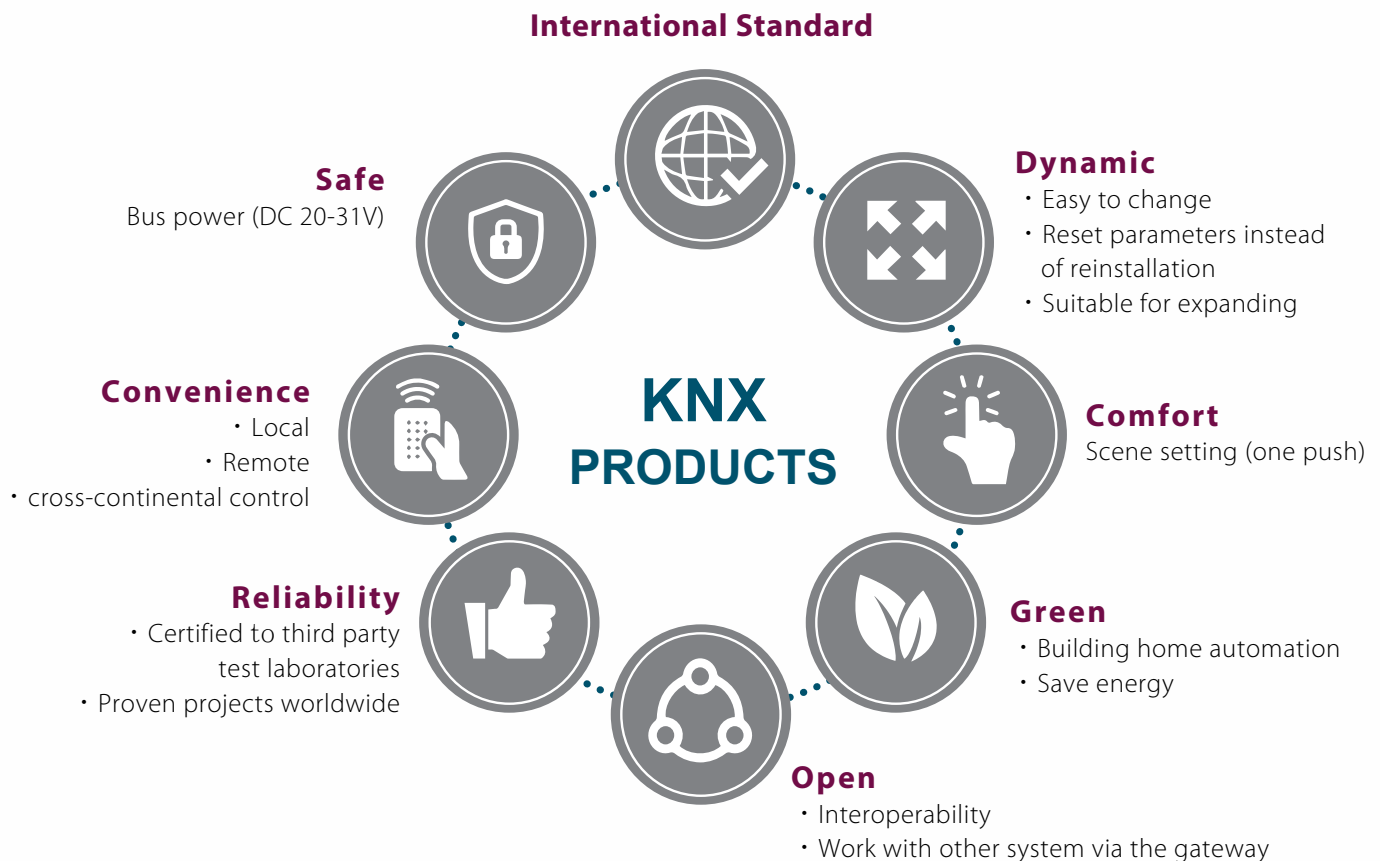

Lighting Control & Total Power Solution

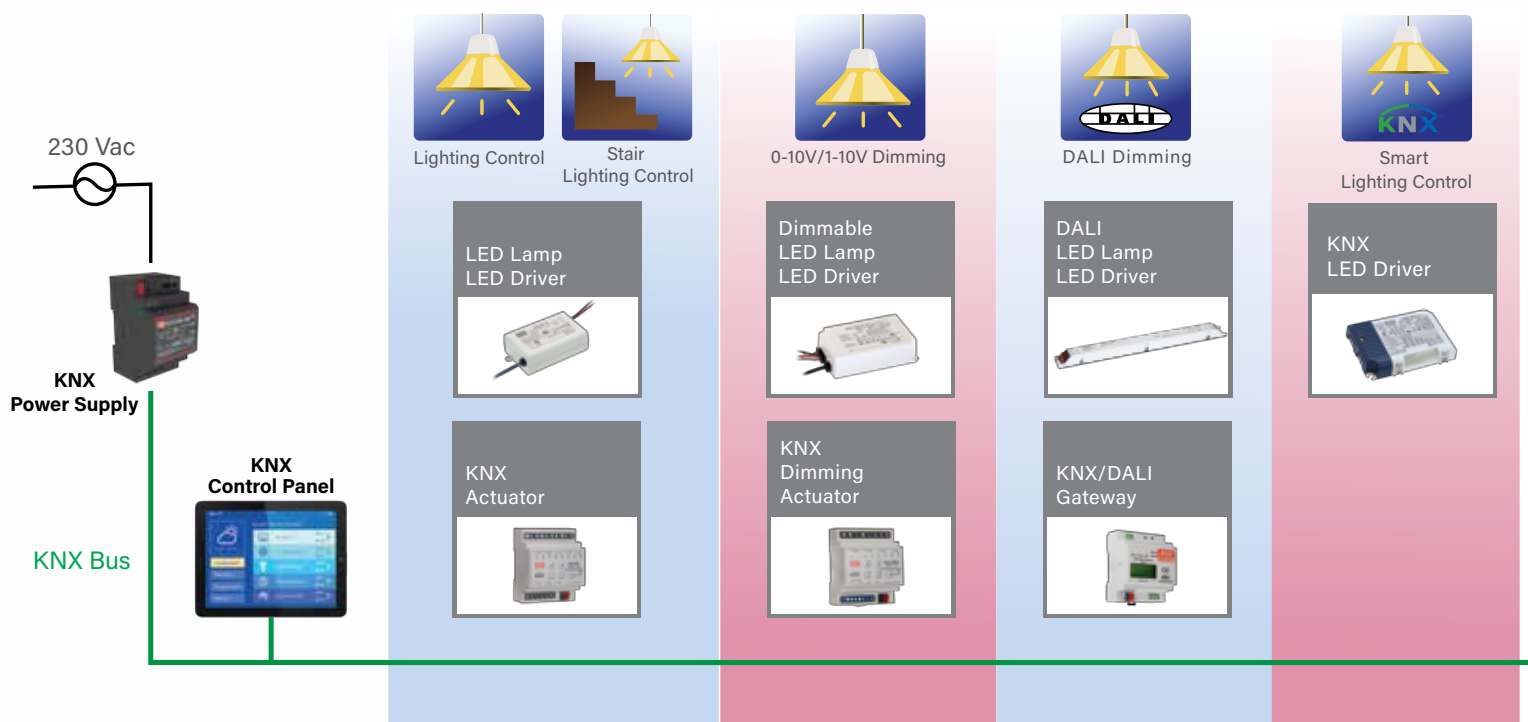

1 LED Drivers



2 Green Adaptors




3 DIN Rail Power



Product Tree



The MEAN WELL KNX product range includes components covering the complete spectrum of applications found in modern buildings, ranging from lighting and shutter control to heating, ventilation, and many more. Furthermore, with over 35 years experience of the industrial power supply, MEAN WELL provides a variety of standard power supplies for all kinds of applications such as safety, surveillance, video, audio etc.

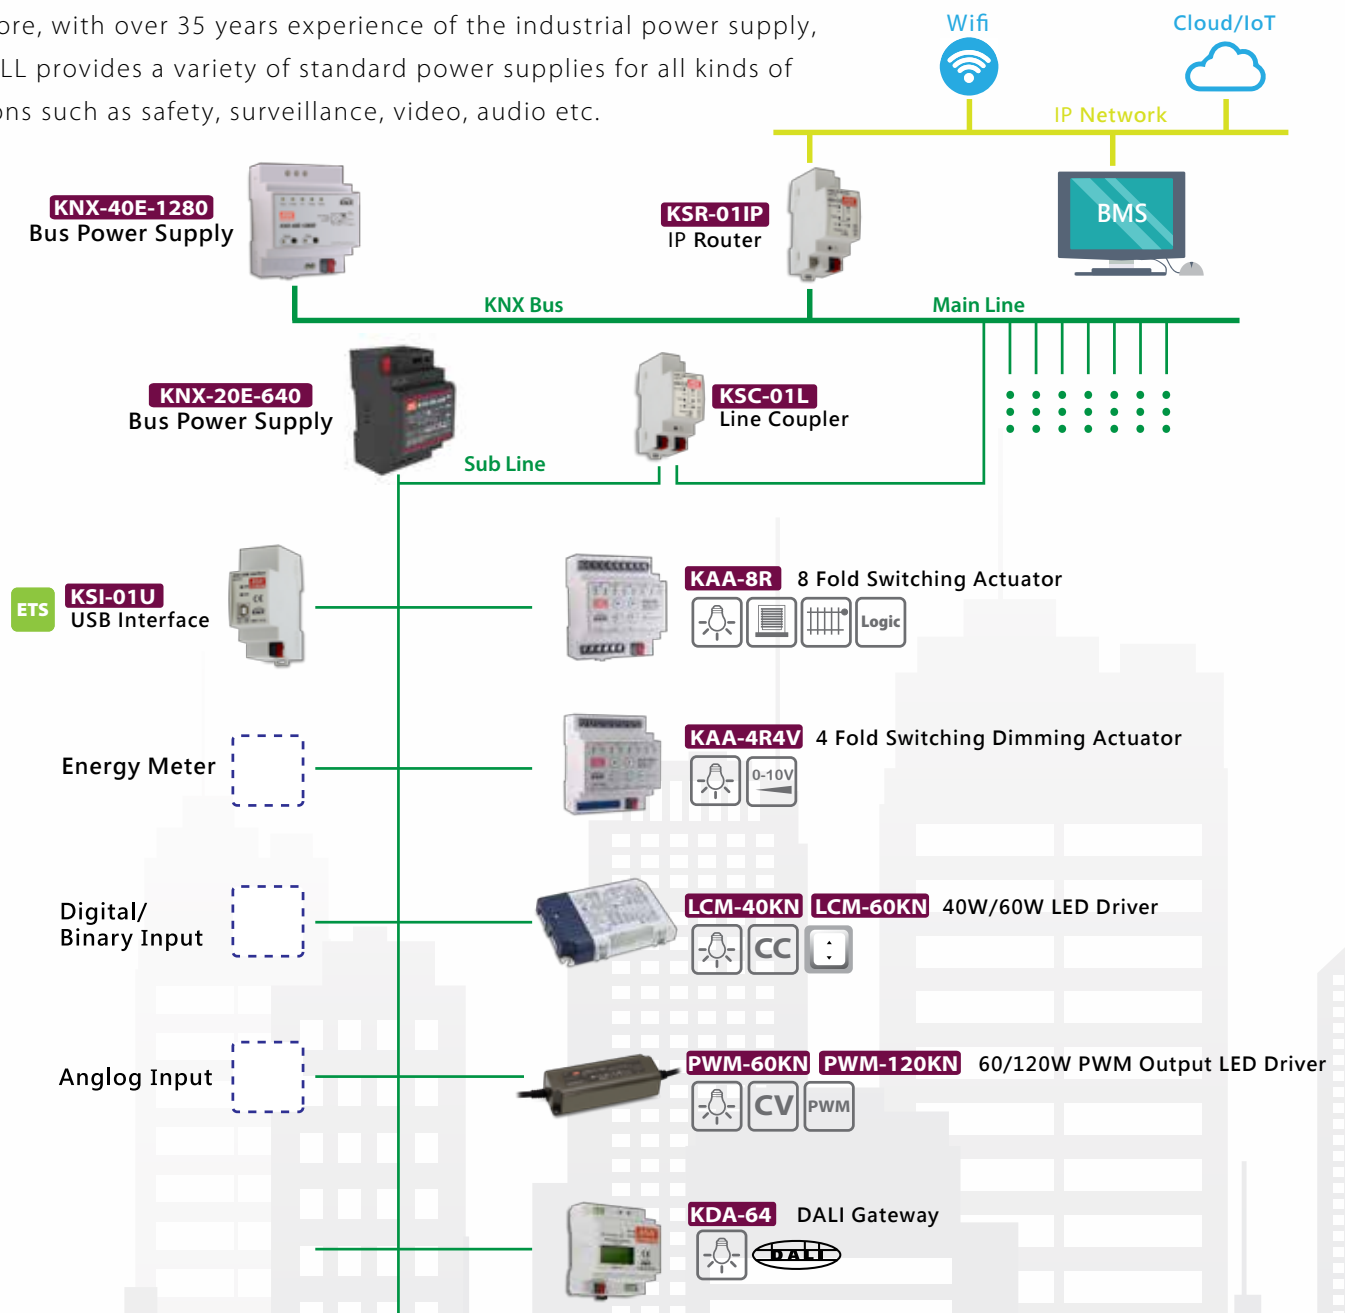

| | | | | | | | | | |
|--|------------------|--|-----------------------|--|-----------------------|--|-------------------------------|--|--------------------------|
| | Under Planning | | Blind/Shutter Control | | Logic Function | | Constant Current Driving Mode | | DC 0-10V Dimming Control |
| | Lighting Control | | Heating Control | | Push Button Interface | | Constant Voltage Driving Mode | | PWM Style Output Mode |



Fast and Multi Language Support for any question of KNX product within 24 hr. For the details please check the last page.



KAA Series

KNX Actuator




KNX Universal Actuator

KAA-8R is a 8 channel device with high quality independent latching relay for switch, shutter or any possible mixed applications.

Features

- 8 channel actuator in a compact size
- Suitable for various and mixed applications
- For AX, C-load, capacitive & inductive of loads
- Program via ETS5.0 software
- Manual control via Push button
- Programmable various time and scene function
- 3 years warranty

| Model No. | Channel | Rating current/ channel |
|-----------|---------|----------------------------|
| KAA-8R | 8-Fold | 16A |
| KAA-8R-10 | 8-Fold | 10A |

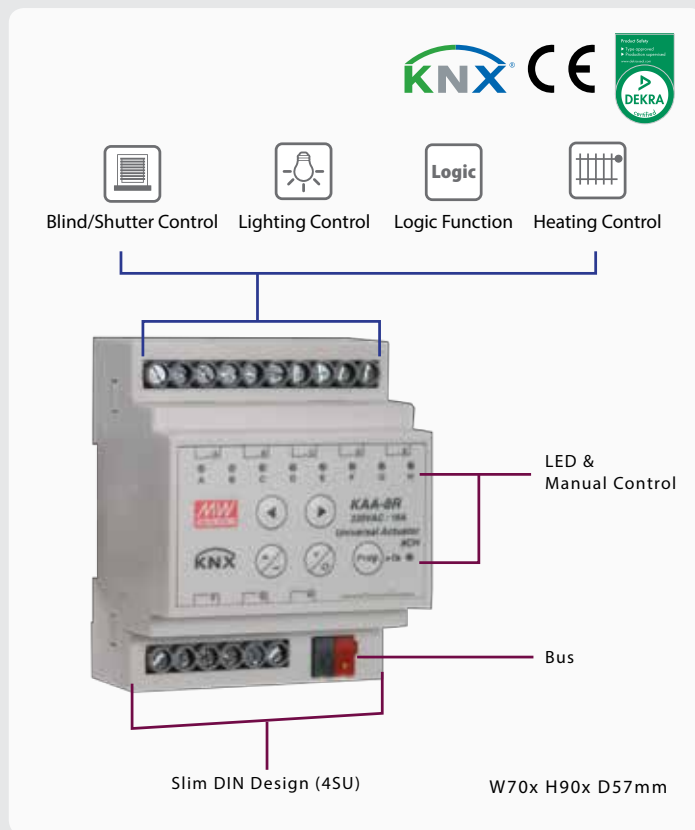

KNX Dimming Actuator

KAA-4R4V dimming actuator is a 4 channels device with high quality independent latching relay to turn on or off, which is suitable for MEANWELL all kinds of LED drivers.

Features

- Dimming and switching LED driver and conventional electronic ballast
- LED indicator for each channel
- Linear or logarithmic dimming curve programmable via ETS software
- Manual control via Push button on panel
- Programmable various time and scene function
- 3 years warranty

| Model No. | Channel | Rating current/ channel |
|-------------|---------|----------------------------|
| KAA-4R4V | 4-Fold | 16A |
| KAA-4R4V-10 | 4-Fold | 10A |



LCM Series

25~60W KNX LED Driver



LCM-KN series is a AC/DC constant current mode output LED driver series featuring the multiple levels selectable by dip switch and the KNX interface to avoid using the complicated KNX-DALI gateway. LCM-KN operates from 180~295VAC and offers different current levels ranging between 350mA and 1400mA. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -30°C~+90°C case temperature under free air convection. In addition, LCM-KN series is equipped with push dimming and synchronization so as to provide the optimal design flexibility for LED lighting system.



Under Development



▲ LCM-25KN
L105x W68x H23mm



▲ LCM-40/60KN
L123.5x W81.5x H23mm

Features

- KNX protocol
- Constant current mode output with multiple levels selectable by dip switch
- Support emergency lighting(EL)
- Constant lumen output
- Intergrated KNX push button interface
- Synchronization up to 10 units
- Functions: manual dim, operation hours, log/linear curve selection
- 3 years warranty

■ LCM-25/40/60KN

| Model No. | Output | Io Tol. | Io Ripple | Effi. |
|-----------|----------------------|---------|-----------|-------|
| LCM-25KN | 350mA~1050mA, 6~54V | ±5% | 5%(max) | 86% |
| LCM-40KN | 350mA~1050mA, 2~100V | ±5% | 5%(max) | 90% |
| LCM-60KN | 500mA~1400mA, 2~90V | ±5% | 5%(max) | 91% |

PWM-60/120KN Series

60/120W PWM Output KNX LED Driver

Under Development

- Constant voltage PWM style output with user changeable frequency
- Plastic housing with class II design
- Built-in active PFC function
- No load power consumption <0.5W / standby power consumption <0.5W
- Integrated KNX control portocol
- No need KNX-DALI gateway
- Typical lifetime >50000 hours
- 5 years warranty



KNX Series

640mA & 1280mA Bus Power Supply



640mA Bus Power Supply

KNX-20E-640 is a 640mA power supply with high efficiency and a small footprint of only 3SU (52.5 mm). The device has a KNX bus choke output and an additional output for ancillary power. LED indicators are used in normal operation, overload conditions and RESET operation. It is perfectly suitable to power up any products labeled with the KNX trademark. KNX-20E-640 is engineered to be a reliable and safe solution for KNX bus environment.



1280mA Bus Power Supply

KNX-40E-1280 is a 1280mA power supply with high efficiency and a small footprint of only 4SU (72mm). The device has a KNX bus choke output and an additional output for ancillary power. LED indicators are used in normal operation, overload conditions and RESET operation. It is perfectly suitable to power up any products labeled with the KNX trademark. KNX-40E-1280 is engineered to be a reliable and safe solution for KNX bus environment.



Features

- EIB / KNX power supply with Integrated choke
- Compact size with 3SU/4SU width
- Safety extra low voltage (SELV)
- 180~264VAC input
- No load power consumption <0.5W
- Protections:
Short circuit / Overload (short-circuit-proof) /
Over voltage

- Cooling by free air convection
- Isolation class I
- LED indicator for normal operation, bus reset and bus overload
- Installed on DIN rail TS-35/7.5 or 15
- Over voltage category III
- Wide operating temperature: -30~+70°C
- 3 years warranty

| Model No. | V _{out1} (with choke) | V _{out2} (without choke) | I _{out} (I ₁ +I ₂) |
|-------------|-----------------------------------|--------------------------------------|---|
| KNX-20E-640 | Bus, 30VDC | 30VDC | 640mA |

| Model No. | V _{out1} (with choke) | V _{out2} (without choke) | I _{out} (I ₁ +I ₂) |
|--|-----------------------------------|--------------------------------------|---|
| KNX-40E-1280 <input type="checkbox"/> <input type="checkbox"/> | Bus, 30VDC | 30VDC | 1280mA |

☐ : Blank, D ; Blank= Basic function, D=Diagnostic function

System Component



DALI Gateway



KDA-64

W86x H72x D55mm



Features

- Easy configuration & installation
- Cost effective solution for smart building
- Connect up to 64 DALI ECGs/Drivers
- Built-in DALI power supply
- LCD 2x12 display
- Lighting control via the button
- Lighting control via the integrated web server
- Up to 16 DALI lighting groups setting
- Up to 16 DALI scenes setting
- 3 year warranty

USB Interface



KSI-01U

W36x H90x D71mm



Features

- No additional external power supply required
- KNX commissioning addressing and parameters settings
- KNX protocol and system visualization
- Diagnostic operations
- Long messages support up to 220 byte APDU
- 3 year warranty

IP Router



KSR-01IP

W36x H90x D71mm



Features

- KNX IP/TP routing
- 4 KNX IP/TP tunnelings
- No additional external power supply required
- Universal Plug and Play
- Telegram filtering
- Built-in web front-end page
- 3 year warranty

Line Coupler



KSC-01L

W36x H90x D71mm




Features

- KNX TP Line coupler/Repeater
- Telegram filtering function
- Long messages support up to 240 byte APDU
- Trace the subline traffic
- Diagnostic functions
- Manual function
- 3 years warranty

HDR Series

15~150W Ultra Slim Step Shape Power Supply



Features

- Ultra slim design with 15U~6SU width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W
- Isolation class II
- Pass LPS (Limited power source)
- DC output voltage adjustable
- Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection (working temperature:-30~+70°C)
- DIN rail TS-35/7.5 or 15 mountable
- Over voltage category III
- LED indicator for power on
- 3 years warranty



▲HDR-15
L17.5x W90x D54.5mm



▲HDR-30
L17.5x W90x D54.5mm



▲HDR-60
L17.5x W90x D54.5mm



▲HDR-100
L17.5x W90x D54.5mm



▲HDR-150
L17.5x W90x D54.5mm

■ HDR-15

| Model No. | Output | Tol. | R&N | Effi. |
|-----------|--------------|------|-------|-------|
| HDR-15-5 | 5V, 0~2.40A | ±2% | 80mV | 80% |
| HDR-15-12 | 12V, 0~1.25A | ±1% | 120mV | 85% |
| HDR-15-15 | 15V, 0~1.00A | ±1% | 120mV | 85.5% |
| HDR-15-24 | 24V, 0~0.63A | ±1% | 150mV | 86% |
| HDR-15-48 | 48V, 0~0.32A | ±1% | 240mV | 87% |

■ HDR-30

| Model No. | Output | Tol. | R&N | Effi. |
|-----------|--------------|------|-------|-------|
| HDR-30-5 | 5V, 0~3.0A | ±2% | 80mV | 82% |
| HDR-30-12 | 12V, 0~2.0A | ±1% | 120mV | 88% |
| HDR-30-15 | 15V, 0~2.0A | ±1% | 120mV | 89% |
| HDR-30-24 | 24V, 0~1.5A | ±1% | 150mV | 89% |
| HDR-30-48 | 48V, 0~0.75A | ±1% | 240mV | 90% |

■ HDR-60

| Model No. | Output | Tol. | R&N | Effi. |
|-----------|--------------|------|-------|-------|
| HDR-60-5 | 5V, 0~6.5A | ±2% | 80mV | 85% |
| HDR-60-12 | 12V, 0~4.5A | ±1% | 120mV | 88% |
| HDR-60-15 | 15V, 0~2.0A | ±1% | 120mV | 89% |
| HDR-60-24 | 24V, 0~1.5A | ±1% | 150mV | 90% |
| HDR-60-48 | 48V, 0~0.75A | ±1% | 240mV | 91% |

■ HDR-100

| Model No. | Output | Tol. | R&N | Effi. |
|-------------|--------------|------|-------|-------|
| HDR-100-12 | 12V, 0~7.1A | ±2% | 120mV | 88% |
| HDR-100-12N | 12V, 0~7.5A | ±2% | 120mV | 88% |
| HDR-100-15 | 15V, 0~6.13A | ±1% | 120mV | 89% |
| HDR-100-15N | 15V, 0~6.5A | ±1% | 120mV | 89% |
| HDR-100-24 | 24V, 0~3.83A | ±1% | 150mV | 90% |
| HDR-100-24N | 24V, 0~4.2A | ±1% | 150mV | 90% |
| HDR-100-48 | 48V, 0~1.92A | ±1% | 240mV | 90% |
| HDR-100-48N | 48V, 0~2.1A | ±1% | 240mV | 90% |

HDR-100: 92W max., pass LPS

HDR-100-xxN: 100W max., non-LPS with a wide output adjustable range

■ HDR-150


| Model No. | Output | Tol. | R&N | Effi. |
|------------|--------------|------|-------|-------|
| HDR-150-12 | 12V, 0~11.3A | ±2% | 100mV | 89% |
| HDR-150-15 | 15V, 0~9.5A | ±1% | 120mV | 89.5% |
| HDR-150-24 | 24V, 0~6.25A | ±1% | 150mV | 90.5% |
| HDR-150-48 | 48V, 0~3.2A | ±1% | 200mV | 92.5% |

Media Kit



MEAN WELL E-news

Find the "SUBSCRIBE" at the footer of MEAN WELL website. Fill in the E-News Subscribe Form, and last click the "SUBSCRIBE". Then, our confirmation e-mail will be sent to you.

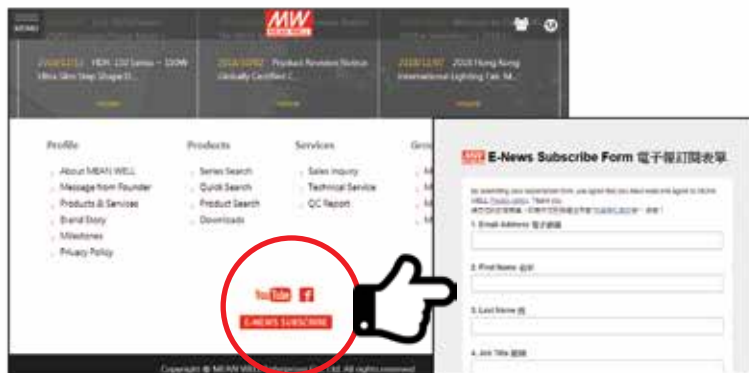

MEAN WELL NEWS APP



Install MEAN WELL NEWS APP, and you won't miss our latest news.



Social Media


01



02



03

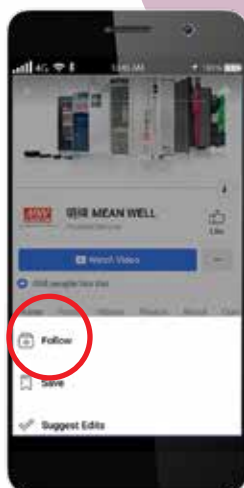

04



05



01 YouTube

- Scan the QR code
- Press "SUBSCRIBE" button
- Turn on the bell. So you won't miss any videos.



02 LinkedIn

- Scan the QR code
- Navigate into MEAN WELL page and "Following" us.



MWUSA



MWEU

03 Facebook

- Scan the QR code
- Find the icon [icon] and choose "FOLLOW"
- Don't forget to "Like" us.



04 WeChat

- Search official account "MEAN WELL" in WeChat APP
- Click the "FOLLOW" button



05 YouKu

- Scan the QR code
- Press the "SUBSCRIBE" button on the top



Taiwan (Headquarters)

MEAN WELL ENTERPRISES CO., LTD.

No. 28, Wuquan 3rd Road, Wugu District,
New Taipei City, Taiwan, 24891

Tel +886-2-2299-6100(rep.)

Fax +886-2-2299-6200(rep.) +886-2-2298-0818(sales)

e-mail info@meanwell.com

Web www.meanwell.com

U.S.A.

MEAN WELL USA, INC.

44030 Fremont Blvd., Fremont, CA 94538, U.S.A.

Tel +1-510-683-8886

Fax +1-510-683-8899

e-mail info@meanwellusa.com **Web** www.meanwellusa.com

Europe

MEAN WELL EUROPE B.V.

Langs de Werf 8, 1185XT Amstelveen, the Netherlands

Tel +31-20-758-6000

Fax +31-20-758-6001

e-mail info@meanwell.eu **Web** www.meanwell.eu

China

MEAN WELL (GUANGZHOU) ELECTRONICS CO., LTD.

No.11, Jingu South Road, Huadong Town, Huadu District,
Guangzhou, Guangdong, China

Tel +86-20-3773-7100 / 400-800-3608(sales)

+86-10-5200-1817(Beijing Office)

+86-755-2359-1630(Shengzhen Office)

R&D Center

2F, A Building, Yuean Industry Park, Huangcun,
Dongpu Town, Tianhe District, Guangzhou, China

Post Code: 510660

Tel +86-20-2887-1200(rep.)

Fax +86-20-8201-0507

e-mail info@meanwell.com.cn **Web** www.meanwell.com.cn

SUZHOU MEAN WELL TECHNOLOGY CO., LTD.

No.77, Jian-Min Rd. Dong-Qiao, Pan-Yang Ind. Park, Huang-Dai
Town, Xiang-Cheng District, Suzhou, Jiang-Su, China

Tel +86-512-6508-8600

Fax +86-512-6508-8700

e-mail info@meanwell.cc **Web** www.meanwell.cc



info@meanwell.com
www.meanwell.com
building.meanwell.com



For service, repairs and telephone support, you can talk to one of our in-house employees. This ensures that you receive specialist advice. You won't simply end up in a call center!

中 文 任何KNX 產品疑問24小時內快速回覆

簡體中文 任何KNX 产品疑问24小时内快速回覆

GERMAN Schneller Support für jegliche KNX-Produkt Fragen innerhalb von 24 Stunden.

ENGLISH Fast support for any question of KNX Product within 24h.

FRENCH Assistance rapide pour toute question relative aux produits KNX en 24 heures maximum.

SPANISH Soporte rápido para cualquier pregunta de los productos KNX en 24 horas.

DUTCH Wij bieden snelle ondersteuning voor al uw KNX-productvragen binnen 24 uur.

ITALIAN Supporto rapido per qualsiasi richiesta sui nostri prodotti KNX entro 24 ore.

POLISH Szybkie wsparcie dla dowolnego pytania dotyczącego produktu KNX w ciągu 24 godzin.

